


Heat transfer presses – overview

🇩🇪 🇺🇸 Transfer Printing

On the following pages you will find an overview with technical details of a range of heat transfer presses. The information is based on data submitted by manufacturers or distributors.

Dieser Überblick bietet Ihnen auf den folgenden Seiten die technischen Spezifikationen von Transferpressen. Die Daten basieren auf Informationen eingereicht von Herstellern oder Vertretern.

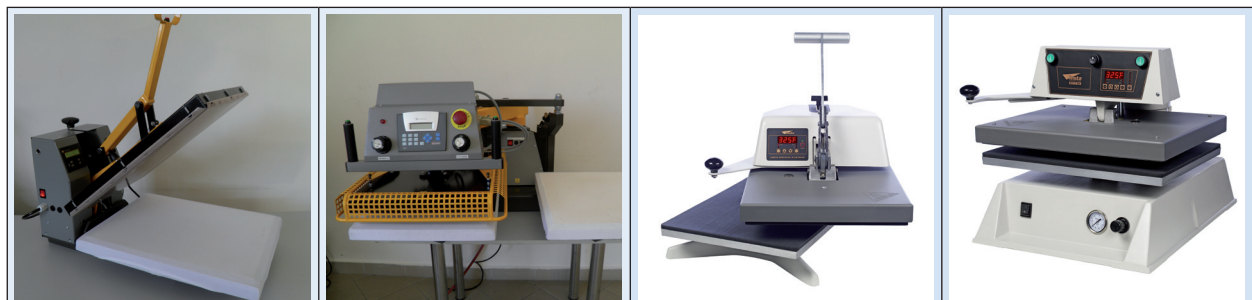


Specifications:	Model 1:	Model 2:	Model 1:	Model 2:
Type:	SSH-12-A combi-heat press with membrane plates	PHP-45-V-2 Optima semi-automatic heat press with membrane plates	Model 228	Model 728
Manufacturer/Distributor:	Druktech Kft (Hungary) www.drucktech.hu	Druktech Kft (Hungary) www.drucktech.hu	Insta Graphic Systems (USA), www.instagramh.com	Insta Graphic Systems (USA) www.instagramh.com
Working area:	Cap: 13 x 9 cm Flat: 15 x 20 cm	Max. 40 x 50 cm	28 x 38 x 24 "	30 x 33 x 25.75 "
Max. Temperature:	230 °C	230 °C	425 °F	425 °F
Max. Time Preset:	999 sec	999 sec	999 minutes	999 minutes
Max. Working Pressure:	Cap: 1,5 kg/sqcm Flat: 0,7 kg/sqcm	0,7 kg/sqcm	100 psi	100 psi
Pressure setting:	Pneumatic	Pneumatic	0 - 100 psi	0 - 100 psi
Power supply:	Cap: 230 V/450 W Flat: 230 V/750 W	230 V/2100 W	240 Volts	240 Volts
Weight:	25 kg	85 kg	135 lbs	180 lbs
Machine Dimensions: (length x width x height)	35 x 50 x 40 cm	105 x 85 x 60 cm	28 x 39 x 24 "	30 x 33 x 26 "
Accessories:	15 x 20 cm heated plate + membrane plate, and for caps	Smaller membrane plates can be ordered additionally	Interchangeable Platens	Interchangeable Platens
Special features:	Membrane plate	Membrane plate	Swing-away manual m/c	Semi-automatic swing-away
Warranty (years):	1	1	1 yr parts, 90 day labor lifetime on upper heating element	1 yr parts, 90 day labor lifetime on upper heating element
Price machine:	~1855.- €	~3990.- €	Call supplier/distributor	Call supplier/distributor

© Gert Jan van Heyningen

			
Model 1:	Model 2:	Model 1:	Model 2:
LTS 138 Slide	LTS 609	TC7	TPD7
Lotus Press Milan (Italy) www.lotustransfers.com	Lotus Press Milan (Italy) www.lotustransfers.com	Secabo GmbH (Germany) www.secabo.com	Secabo GmbH (Germany) www.secabo.com
38 x 45 cm	160 x 100 cm	40 x 50 cm	2 x 40 x 50 cm
250 °C	250 °C	225 °C	225 °C
999 sec	999 sec	999s	999s
450 g/cm ²	8 bar	250g/cm ²	350g/cm ²
Semiautomatic	Pneumatic	Manual setting by handwheel	Setting of pneumatic pressure
2 kw – 220 Volt	8,4 kw – 380 Volt	230V, 2.0k W	230V, 2.0k W
55 kg	700 kg	45 kg	98 kg
80 x 50 x 100 cm	160 x 160 x 150 cm	41 x 50 x 80 cm	100 x 58 x 75 cm
Cap set and various printing plates		Slide unit, quick-change system, Exchangeable base plates, membrane base plate	Quick-change system, exchangeable base plates, membrane base plate
Opens and swings automatically	XXL printing size and pressure	Modular setup, all parts can be exchanged easily	Pneumatic double plate heat press for high output with easy handling
2	2	2 years	2 years
On request	On request	€829	€1949

Stitch &
Print

3031

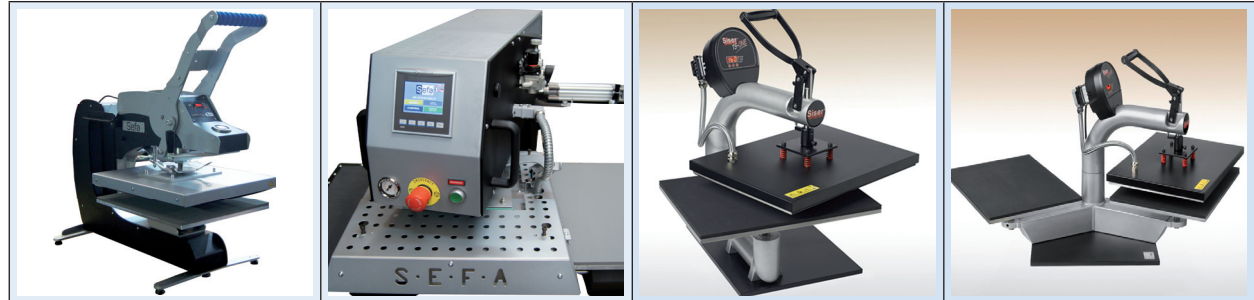

Specifications:	Model 1:	Model 2:	Model 1:	Model 2:
Type:	Rotex Pro, auto rotating & auto open press	Air Duplex Multi, pneumatic dual-plated press with membrane and a foot control	Manual Heat Press TS One	Pneumatic, TS Double
Manufacturer/Distributor:	Sefa (France), www.sefa.fr Chemica (France), www.chemica.fr	Sefa (France), www.sefa.fr Chemica (France), www.chemica.fr	Siser (Italy), www.siser.it	Siser (Italy), www.siser.it
Working area:	40 x 50 or 40 x 60 cm	2 times 40 x 50 cm	38 x 50 cm	40 x 50 cm
Max. Temperature:	220°C	220°C	220 °C	250 °C
Max. Time Preset:	570 sec		999 sec	999 sec
Max. Working Pressure:	500 gr/cm ² with the 40x50 plate	500 gr/cm ²	0,5 – 0,8 kg/cm ²	2,5 – 10 bar
Pressure setting:	Manual wheel	Manual manometer	Manuel	Pneumatic
Power supply:	230V single phase	230V single phase	220 V	220 V – 50 Hz monofase
Weight:	84 Kg	143 Kg	46 kg	Ca. 100 kg
Machine Dimensions: (length x width x height)	95,4 x 62,3 x 88,6 cm	107 x 84x 63 cm	70 x 60 x 60 cm	100 x 80 x 70 cm
Accessories:	Protection cover, 4-plate kit, support table	Protection cover, 4-plate kit with quick release system, support table, smaller membrane plate	Plates for caps, plates 15x15 cm	Plates for caps, plates 15x15 cm
Special features:	Auto open, auto rotation, reversible C-shaped part, change of plates extra fast, 2 timers, 3 programs Time/Temperature you can save, 2 counters.	Possibility to mount either 2 normal aluminum plates, 2 membrane plates or on of each. Foot controlled, reversible C-shaped part, change of plates extra fast, 2 timers, 4 programs. Time/ Temperature you can save, 2 counters, eco-mode.	Comfortable “swing” opening	Press opens automatically swiveling to the side. Operating safety is ensured by its two Start and one Emergency – Stop buttons.
Warranty (years):	2 years for the machine itself & 10 years for the heating elements	2 years for the machine itself & 10 years for the heating elements	1 year	1 year
Price machine:	2420€ tax not included	7250€ tax not includes	On request	On request

Stitch &
Print

3233

			
Model 1: Hotronix Fusion swing and draw press	Model 2: Hotronix Auto Open semi automatic clam	Model 1: TS 3P, pneumatic single platen	Model 2: TS 5P, pneumatic double platen
Stahls' Hotronix (USA) www.hotronix.com	Stahls' Hotronix (USA) www.hotronix.com	Transmatic (Italy), www.transmaticsr.com	Transmatic (Italy), www.transmaticsr.com
16 x 20" / 40 x 50 cm	16 x 20" / 40 x 50 cm	50 x 40 cm	2 plates 40 x 50 cm
430 °F / 222 °C	430 °F / 222 °C	255 °C	255 °C
999 seconds up to 5 different times	999 seconds up to 2 different times	999,9 sec	999,9 sec
90 PSI = 9 on display on pneumatic machines 120 PSI	90 PSI = 9 on display	2,5 – 10 bar	2,5 – 10 bar
Light (1-3), Medium (4-6), Heavy (7-9)	Light (1-3), Medium (4-6), Heavy (7-9)	Semi-automatic pneumatic	Pneumatic, 1/2 automatic
110 or 220 Volts - UL/ULC/CE/RoHs compliant	110 or 220 Volts - UL/ULC/CE/RoHs compliant	230 V	230 V
140 LBS	100 LBS	70 – 85 Kg	116 Kg
37 x 25 x 24 "	36 x 25 x 21 "	70 x 60 x 60	100 x 60 x 60
Optional platens, Teflon sheet, pillows, heat eraser, quick slip pad protector, upper cover, silicon pad, laser alignment system	Optional platens, Teflon sheet, pillows, heat eraser, quick slip pad protector, upper cover, silicon pad, caddie on wheels	Changeable platens/Cap accessory	Changeable platens/Cap accessory
Draw or Swing (dual function) Touch screen technology in 8 languages, unlimited preset programs, threadability makes it easy to load garments onto the lower platen and print front, back and sides. Easy to install interchangeable platens, cast-aluminum frame, cast in tubular heating, powder coated finish.	Patented magnetic auto-open feature. Wide opening for easy layout. Over-the-Center Pressure Adjustment for even, edge-to-edge heat and pressure. Laser cut steel, cast in tubular heating, powder coated finish.	Pneumatic heat press opens automatically swiveling to the side. Operating safety is ensured by its two Start and one Emergency – Stop buttons.	Pneumatic heat press with double heating plates, opens automatic and moveable heating plate. Pressing and positioning at the same time. Option: automatic movable head.
Life time warranty on heating element, 5 years framework, 2 years circuit board, parts and labor 1 year	Life time warranty on heating element, 5 years framework, 2 years circuit board, parts and labor 1 year	12 months	12 months
Starting at \$1950 depending on the Market due to freight charges and customs costs	Starting at \$1500 depending on the Market due to freight charges and customs costs	On request	On request